



Product Data Sheet

Výbojkové svítidlo SYMETRIC

MERCURY 150 MH SYMETRIC RX7s IP65



Order number

912061000

Unit EAN13 code

8595209902559

General information

Model/Description	Výbojkové svítidlo
Finish	Průmyslové
Brand/Manufacturer	NBB
Material	Aluminium
Lamp type	MH nebo sodíková výbojka
Degree of protection (IP)	IP65
Dimmable	Ano
Lamp type	MH výbojka
Nominal voltage (V)	230 - 240 V
Degree of protection (IP)	IP65
Suitable for number of lamps	1
Suitable for wall mounting	Ano
Suitable for traverse mounting	Ano
Suitable for pedestal/floor mounting	Ano
Suitable for ceiling mounting	Ano
Dimmable by conventional dimmers	Ne
Název položky	MERCURY 150 MH SYMETRIC RX7s IP65

Electrical characteristics

Capacity of the Capacitor	18 μ F μ F
Nominal wattage	150 W
Rated power (W)	150 W
Capacitor needed to be used	Ano μ F
Operating voltage (V)	220 - 240 V
Type of Voltage	AC

Pulse height	5 kV
Lamp operating current	1,8 A
Direct connection to the mains	Ano
Lamp power	150 W
Voltage type	AC
Suitable for lamp power	150 W
Nominal current (A)	0,62 A
System power	160 W
Total power (W) (light fitting)	149 W

Working conditions

Operating frequency	50 - 60 Hz
Hot restart	Ne
Burning position	Libovolná
Installation height (m)	3 - 10 m
Installation on flammable surfaces	Ano
Application	Všeobecné osvětlování
Suitable for through-wiring	Ne
Lamp holder type	RX7s
Type of control gear	Magnetický
Ambient temperature	40 °C
Fire resistance "F"	Ano
Type of dimming	Nestmívatelné

Mounting methods/application

Mounting method	Přisazená
-----------------	-----------

Physical characteristics

Dimensions (mm)	225 x 227 x 100 mm
Packing method	1
Spacing of fixing holes	mm
Width	227 mm
Reflector	Vysoce leštěný
Colour housing	Šedá
Weight netto	g
Length	100 mm
Height/depth (mm)	285 mm
Material housing	Aluminium
Impact strength	IK08
Type of surface	Matný
Adjustability	Vertikálně

EuP Parameters

Bulb type (size) for which is the luminaire designed.	Čirá
---	------

Additional information

With lamp	Ne
-----------	----

Lighting characteristics

Light sharing	Symetrické
Radiation angle	Široký úhel

Safety information

Insulation class	Třída I
Protection class	Ochranným vodičem

Energetic characteristics

Energy Efficiency Index	B2
Lamp Power factor (PF)	0,99
Svítlidlo je vhodné pro sv. zdroje s EEI ...	A, A+

Exclusion of liability

Changes to data are subject to prior notice. NBB Bohemia s.r.o. accepts no responsibility for damages caused by inaccurate interpretation of the content on this site.

Notice

This product ranks among electrotechnical products powered by mains voltage 230-240V. For safety reasons, it is recommended that the assembly, connection or disassembly be carried out by a person with an appropriate electrotechnical qualification. Please note that the product may only be put into service with original covers, otherwise there may be a risk of electric shock, especially from the terminal block. Only use the product in places that are suitable for this purpose; do not use products intended for indoor use only in the outdoor environment. When installing or dismantling an emergency luminaire, we recommend disconnecting the power supply otherwise there may be a risk of electric shock. Observe the prescribed position when operating the product and how it is attached. Only connect the product to the rated voltage, or load it only to the maximum permitted power. Install only light sources for this type of luminaire. The manufacturer can not be held responsible for damages resulting from inappropriate connection, connection to an unsuitable distribution system, or damage resulting from the use of an unsuitable light source. Observe the operating values on the label. Do not expose the product to inappropriate weathering or high temperatures unless it is expressly stated that the product is intended to be operated under these conditions. When installing, wiring or disassembling, follow the generally accepted safety precautions.


NOTICE:

The emergency luminaire is energized even after disconnecting the power supply due to its own charged batteries. Therefore, it is recommended that the installation and disassembly be carried out only by a person with the appropriate electrotechnical qualifications.

Do not throw the emergency luminaire into the mixed waste after use. Take it to the nearest store, collection yard, or other designated location for free recycling. You can also deliver the used luminaires for recycling at our sales outlets. Emergency lights and modules contain a rechargeable battery. You can find the list of collection points on the Retel and Ekolamp Collective Systems pages.

Popis

Technical drawing

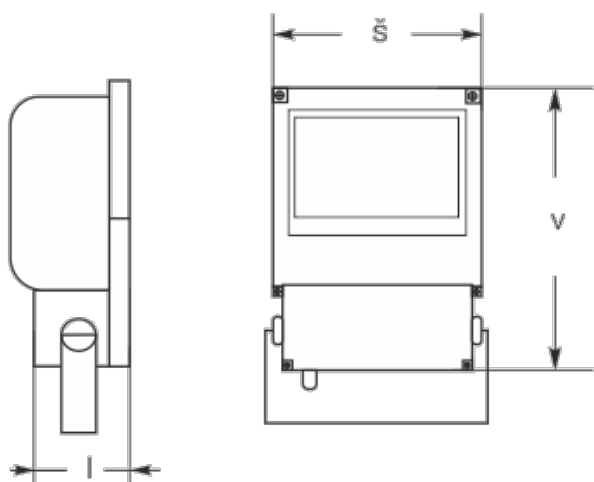

NBB Bohemia s.r.o., Sídliště 693, 407 22 Benešov nad Ploučnicí
<https://www.nbb.cz/en/> | hotmail@nbb.cz

Copyright © 2024 NBB Bohemia s.r.o. Všechna práva vyhrazena.