




NBB Bohemia s.r.o.

Výroba a prodej osvětlovací techniky, Sídliště 693, 407 22 Benešov nad Ploučnicí

Product Data Sheet

LED svítidlo přisazené, prisma 2ks 1434x73mm

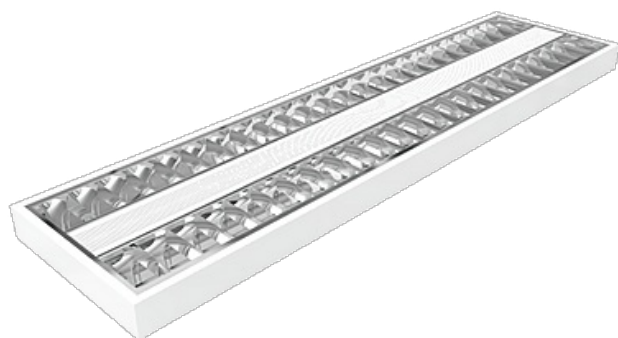

ELLIS-P PAR prisma
56W/840 LEDline
295x1495x55mm

Order number

910464779

Unit EAN13 code

8595209973085

General information

| | |
|----------------------------------|--|
| Finish | Kancelářské s PAR mřížkou a prisma kryt. |
| Brand/Manufacturer | NBB |
| Material | Body steel 0,5mm/Louver aluminium 0,3 mm |
| Lamp type | Nevýměnné LED |
| Nominal service life (h) | 50 000 h |
| Degree of protection (IP) | IP20 |
| Dimmable | Ne |
| Type of luminaire | Svítidlo s krytem |
| Nominal voltage (V) | 230-240 V |
| Suitable for number of lamps | 4 |
| Dimmable by conventional dimmers | Ne |
| Název položky | ELLIS-P PAR prisma 56W/840 LEDline 295x1495x55mm |

Electrical characteristics

| | |
|---------------------------------|-------------|
| Nominal wattage | 56 W |
| Rated power (W) | 56,37 W |
| Operating voltage (V) | 220 - 240 V |
| Total power (W) (light fitting) | 56,37 W |

Working conditions

| | |
|--------------------------------------|------------|
| Average lifetime of the ballast (h) | 25000 h |
| Operating frequency | 50 - 60 Hz |
| Dimmable range | 0-100% % |
| Light source is part of the fixture | Ne |
| Permanent connection to mains supply | Ano |

| | |
|--|--|
| Heat protection | Ano |
| Protection against damage during power failure | Ano |
| Protection against overvoltage | Ano |
| Cooling Type | Vzduchem/Air |
| Installation height (m) | 2,5-5 m m |
| Installation on flammable surfaces | Ne |
| Application | Všeobecné osvětlování/General lighting |
| Lamp holder type | Ostatní |
| Type of control gear | Elektronický nestmívatelný |
| Ambient temperature | 35 °C |

Mounting methods/application

| | |
|-----------------|-----------|
| Mounting method | Přisazené |
|-----------------|-----------|

Physical characteristics

| | |
|---------------------------------|----------------|
| Numbers of ballasts | 1 |
| Type of connector | 3P |
| Dimensions (mm) | 1495x295x55 mm |
| Packing method | 1 |
| Weight gross | 2,91 g |
| Back reflector | Ne |
| Width | 295 mm |
| Colour housing | Bílá |
| Weight netto | 3,2 g |
| Length | 1495 mm |
| Height/depth (mm) | 55 mm |
| Power cable with quick coupling | Ne |

EuP Parameters

| | |
|--|---------|
| Average Lifetime B50 (h) | 25000 h |
| Average lifetime of the light source (h) | 10000 h |
| Number of maximal switching cycles | 30.000 |
| The rate of premature failures | <1% % |
| Rated service life | 50000 h |

Safety information

| | |
|---------------------|--|
| Insulation class | Třída I |
| Safety instructions | www.nbb.cz |

Energetic characteristics

| | |
|-----------------------------|-----------|
| Lamp Power factor (PF) | 0,98 |
| Rated efficiency after 100h | 99,99 % % |

Popis

NBB Bohemia s.r.o., Sídliště 693, 407 22 Benešov nad Ploučnicí
<https://www.nbb.cz/en/> | hotmail@nbb.cz

Copyright CE 2024 NBB Bohemia s.r.o Všechna práva vyhrazena.