



Product Data Sheet

LED žárovka

LQ5 LED A60 240V 12W
E27 DIMM 3000K NBB



Order number

248000330

Unit EAN13 code

8595209945181

General information

| | |
|------------------------------------------------|------------------------------------------------|
| Model/Description | LED zdroje |
| Brand/Manufacturer | NBB |
| Lamp type | A60 |
| Nominal service life (h) | 25000 h |
| Colour | Bílá |
| Socket | E27 |
| Dimmable | Ano |
| Energy efficiency class (canceled regulation!) | A+ |
| Nominal voltage (V) | 230 - 240 V |
| Degree of protection (IP) | IP20 |
| Dimmable by conventional dimmers | Ano |
| Název položky | LQ5 LED A60 240V 12W E27 DIMM 3000K NBB |

Electrical characteristics

| | |
|----------------------------------------|--------------------|
| Nominal wattage | 12 W |
| Rated power (W) | 12 W |
| Operating voltage (V) | 170 - 240 V |
| Type of Voltage | AC |
| Lowest permitted operating voltage (V) | 170 V |
| Nominal current | 105 mA |
| Lamp power | 12 W |
| Voltage type | AC |
| With remote control | Ne |
| Nominal current (A) | 0,104 A |

Working conditions

| | |
|---------------------------------------|-----------------------|
| Integrated driver | Ano |
| Operating frequency | 50 - 60 Hz |
| Dimmable range | 1 - 100 % |
| Maximum permitted storage temperature | 50 °C |
| Suitable for domestic use. | Ano |
| Application | Všeobecné osvětlování |
| Suitable for frequent switching | Ano |
| Ambient temperature | -10/+40 °C |

Physical characteristics

| | |
|---------------------|--------------|
| Type of chip | 2835 |
| Dimensions (mm) | Ø60 x 108 mm |
| Packing method | 1 |
| Weight gross | 90 g |
| Weight netto | 75 g |
| Diameter | 60 mm |
| Lamp shape | Standard |
| Length | 108 mm |
| Type of glass/cover | Matný |

EuP Parameters

| | |
|--------------------------------------------------------|--------------|
| Average Lifetime B50 (h) | 25000 h |
| Luminescence Life maintenance factor | 70,0 % |
| Factor of functional reliability (LSF) after nom. life | 50,0 % |
| Time to 60 % luminous flux | 0,3 s |
| Number of maximal switching cycles | 25000 |
| The rate of premature failures | <1 % |
| Colour difference | 90 % |
| Rated service life | 25000 h |
| Energy consumption (AGGR) | 12 kWh/1000h |
| Turn-on time | <0,3 s |
| GLS replacement | 73 W |
| Ekvivalent halogenové žárovky | 65 W |

Lighting characteristics

| | |
|----------------------------|------------|
| Color rendering | 1B |
| Light Colour | teplá bílá |
| Dominant wavelength | 605 nm |
| Luminous flux | 960 lm |
| Colour temperature | 3000 K |
| Colour rendering index CRI | 80 Ra |
| Maximal intensity (Cd) | 324,6 Cd |
| Colour of light | 830 |
| Colour controllable (RGB) | Ne |
| Beam angle Degrees (°) | 120 ° |
| Chromaticity coordinates x | 0,440 |

Chromaticity coordinates y **0,403**

Safety information

Safety instructions **www.nbb.cz**

Environmental characteristics

Mercury content **0,00 mg**

Energetic characteristics

Lamp Power factor (PF) **>0.5**

Rated efficiency after 100h **99,99 %**

Lamp efficacy **85,0 lm/W**

Exclusion of liability

Changes to data are subject to prior notice. NBB Bohemia s.r.o. accepts no responsibility for damages caused by inaccurate interpretation of the content on this site.

Notice


Under the scope of Act 185/2001 Coll. as amended, this product is included in waste group 5 (light sources and luminaires). In view of the harmful effects of mercury on the environment and on human health, the creators of group 5 waste (consumers) are obliged to dispose of used light sources for recycling. Do not throw this product into mixed waste after use. Take it to the nearest store, collection yard, or other designated location for free recycling. You can also dispose of the used products for recycling in our sales outlets or in collection points of collective recycling systems or municipal collection yards. Ecological recycling of waste electrical and electronic equipment is ensured through the RETELA collective system (www.retela.cz).

Notice

Single LED chip failure, luminous flux deviation +/- 10% as well as chromaticity deviation +/- 150K are in compliance with applicable standards and are not a reason for complaint.

Popis

Technical drawing

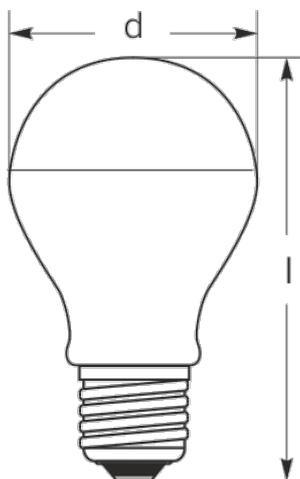

NBB Bohemia s.r.o., Sídliště 693, 407 22 Benešov nad Ploučnicí
<https://www.nbb.cz/en/> | hotmail@nbb.cz

Copyright CE 2024 NBB Bohemia s.r.o. Všechna práva vyhrazena.