



NBB Bohemia s.r.o.

Výroba a prodej osvětlovací techniky, Sídliště 693, 407 22 Benešov nad Ploučnicí

Product Data Sheet

Zářivkové svítidlo vestavné

**EMILIA 418 230-240V 7L
EVG V-PAR REF/SP IP20**



Order number

910380021

Unit EAN13 code

8595209900067

General information

Model/Description	Zářivkové svítidlo
Finish	Vestavné
Brand/Manufacturer	NBB
Material	Plech
Lamp type	T8
Nominal service life (h)	50000 h
Degree of protection (IP)	IP20
Dimmable	Ne
With light sensor	Ne
Suitable for suspended mounting	Ne
Lamp type	Zářivka Ø 26 mm
Type of luminaire	Kancelářské
Nominal voltage (V)	230-240 V
Degree of protection (IP)	IP20
Suitable for number of lamps	4
Suitable for wall mounting	Ne
Suitable for built-in mounting	Ano
Control gear included	Ano
Suitable for surface mounting	Ne
Suitable for ceiling mounting	Ano
Dimmable by conventional dimmers	Ne
Název položky	EMILIA 418 230-240V 7L EVG V-PAR REF/SP IP20

Electrical characteristics

Nominal wattage	4x18 W
-----------------	---------------

Rated power (W)	72 W
Operating voltage (V)	198-264 V
Endurance	264 V V
Type of Voltage	AC
Lowest permitted operating voltage (V)	198 V V
Direct connection to the mains	Ano
Lamp power	18 W
Circuit	Paralelně-kompenzační
Voltage type	AC
Lamp power at multiwatt	Neaplikovatelné
Nominal current (A)	0,33 A
System power	72 W
Total power (W) (light fitting)	72,0 W

Working conditions

Output frequency of ballast (driver)	>40 kHz kHz
Operating frequency	50Hz Hz
Light source is part of the fixture	Ne
Ambiente temperature for max. luminous flux	25 °C °C
Hot restart	Ano
Protection against damage during power failure	Ano
Protection against overvoltage	Ano
Cooling Type	Vzduchem/Air
Burning position	Universal
Installation height (m)	2-6m m
Installation on flammable surfaces	Ne
Application	Všeobecné osvětlování
Lamp holder type	G13
With movement sensor	Ne
Type of control gear	Elektronický
Ambient temperature	40 °C
Suitable for light line configuration	Ne
Suitable for emergency lighting	Ne
Fire resistance "D"	Ano
Build in insulated ceiling, fire-resistance "F with roof"	Ano
Fit for monitor workplace	Ano
Type of dimming	Nestmívatelné
Emergency unit integrated	Ne
Filament test according to IEC 60695-2-10	Neuvedeno

Mounting methods/application

Mounting method	Do minerálních podhledů a sádkkartonu
Dimensions of installation hole	600 x 600 mm mm

Physical characteristics

Number of lamella	7
Numbers of ballasts	1
Finish diffuzor	Leštěná parabolická mřížka

Type of connector	3P
Dimensions (mm)	595 x 595 x 80 mm
Packing method	1
Type of grille	reflektor, lamela parabolická
Back reflector	Ano
Width	595 mm
Reflector	Vysoce leštěný
Colour housing	Bílá RAL
Weight netto	4,900 kg g
Type of grid	Vysoce leštěná
Cable length	0,4 m mm
Built-in width	600 mm
Length	595 mm
Height/depth (mm)	80 mm
Material housing	Ocelový plech
Built-in length	600 mm
Material cover	Bez krytu
Impact strength	IK04
Power cable with quick coupling	Ne
Type of surface	Briliant
With air slots	Ne
Built-in height/depth	100 mm

EuP Parameters

Average Lifetime B50 (h)	25000 h
Factor of functional reliability (LSF) after nom. life	50% %
Luminaire maintenance factor	1,0
Number of maximal switching cycles	30.000
The rate of premature failures	<1% %

Additional information

With lamp	Ne
-----------	----

Lighting characteristics

Light outlet	Přímé
Light sharing	Symetrické
Radiation angle	Extremně široký úhel >80°

Safety information

Insulation class	Třída I
Safety instructions	www.nbb.cz
Protection class	Ochranným vodičem

Energetic characteristics

Lamp Power factor (PF)	0,98
------------------------	------

Exclusion of liability

Changes to data are subject to prior notice. NBB Bohemia s.r.o. accepts no responsibility for damages caused by inaccurate interpretation of the content on this site.

Notice

This product ranks among electrotechnical products powered by mains voltage 230-240V. For safety reasons, it is recommended that the assembly, connection or disassembly be carried out by a person with an appropriate electrotechnical qualification. Please note that the product may only be put into service with original covers, otherwise there may be a risk of electric shock, especially from the terminal block. Only use the product in places that are suitable for this purpose; do not use products intended for indoor use only in the outdoor environment. When installing or dismantling an emergency luminaire, we recommend disconnecting the power supply otherwise there may be a risk of electric shock. Observe the prescribed position when operating the product and how it is attached. Only connect the product to the rated voltage, or load it only to the maximum permitted power. Install only light sources for this type of luminaire. The manufacturer can not be held responsible for damages resulting from inappropriate connection, connection to an unsuitable distribution system, or damage resulting from the use of an unsuitable light source. Observe the operating values on the label. Do not expose the product to inappropriate weathering or high temperatures unless it is expressly stated that the product is intended to be operated under these conditions. When installing, wiring or disassembling, follow the generally accepted safety precautions.


NOTICE:

The emergency luminaire is energized even after disconnecting the power supply due to its own charged batteries. Therefore, it is recommended that the installation and disassembly be carried out only by a person with the appropriate electrotechnical qualifications.

Do not throw the emergency luminaire into the mixed waste after use. Take it to the nearest store, collection yard, or other designated location for free recycling. You can also deliver the used luminaires for recycling at our sales outlets. Emergency lights and modules contain a rechargeable battery. You can find the list of collection points on the Retel and Ekolamp Collective Systems pages.

Popis

Technical drawing

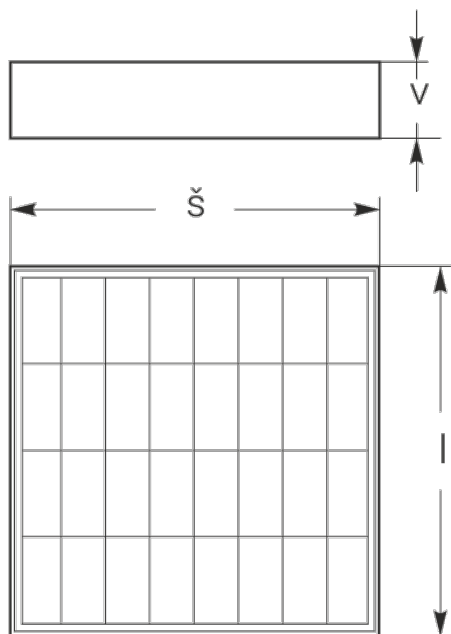

NBB Bohemia s.r.o., Sídliště 693, 407 22 Benešov nad Ploučnicí
<https://www.nbb.cz/en/> | hotmail@nbb.cz

Copyright CE 2024 NBB Bohemia s.r.o. Všechna práva vyhrazena.