



NBB Bohemia s.r.o.

Výroba a prodej osvětlovací techniky, Sídliště 693, 407 22 Benešov nad Ploučnicí

Product Data Sheet

Třípásmová lineární zářivka T8

LT 58W T8/830 NARVA



Order number

108514000

Unit EAN13 code

4054657104006

General information

Model/Description	Zářivková trubice
Finish	Lineární
Brand/Manufacturer	NARVA
Lamp type	T8
Colour	Ostatní
Socket	G13
Dimmable	Ano
Energy efficiency class (canceled regulation!)	A
Ignition strip	Ne
Fast ignition	Ne
Starter less operation	Ne
Suitable for explosion proof luminaires	Ne
Dimmable by conventional dimmers	Ne
Název položky	8 - 830
Třída energetické účinnosti podle 2019/2015	G

Electrical characteristics

Nominal wattage	58 W
Rated power (W)	58,0 W
Operating voltage (V)	110 V
Type of Voltage	AC
Direct connection to the mains	Ne
Lamp power	58 W
Nominal current (A)	0,670 A

Working conditions

Ambiente temperature for max. luminous flux	25 °C
Burning position	Libovolná
Application	Pro všeobecné osvětlování
Application	Všeobecné osvětlení
Suitable for electronic ballast	Ano
Suitable for emergency lighting	Ne
For application at low temperatures	Ne

Physical characteristics

Dimensions (mm)	Ø26 x 1.500 mm
Packing method	25 - 1
Weight gross	255 g
Weight netto	220 g
Splitter protection	Ne
Tube diameter	26 mm
Lamp shape	Lineární
Length	1500 mm
Internal reflector	Ne
Double-walled	Ne

EuP Parameters

Average Lifetime B50 (h)	20000 h
Luminescence Life maintenance factor	89,0 %
Number of maximal switching cycles	> 100.000/warm start
The rate of premature failures	<1 %
Rated service life	20000 h
Energy consumption (AGGR)	68 kWh/1000h

Lighting characteristics

Type of spectrum	Třípásmové
Color rendering	1B
Light Colour	Teplá bílá
Dominant wavelength	612 nm
Luminous flux	5200 lm
Colour temperature	3000 K
Colour rendering index CRI	84 Ra
Full spectrum lamps	Ne
Colour of light	830
Colour of light acc. EN 12464-1	Warm <3300 K
Beam angle Degrees (°)	360 °
Chromaticity coordinates x	0,435
Chromaticity coordinates y	0,411

Safety information

Safety instructions	www.nbb.cz
---------------------	--

Environmental characteristics

Mercury content	3,0 mg
-----------------	--------

Energetic characteristics

Rated efficiency after 100h	99,99 %
Lamp efficacy	90,5 lm/W

Lamp survival factor (LSF)

LSF after 2.000 hrs	99,8 %
LSF after 4.000 hrs	99,5 %
LSF after 6.000 hrs	99,3 %
LSF after 8.000 hrs	99,1 %
LSF after 12.000 hrs	98,6 %
LSF after 16.000 hrs	83,5 %
LSF after 20.000 hrs	50,0 %

Lamp lumen maintenance factor (LLMF)

LLMF after 2.000 hrs	97,5 %
LLMF after 4.000 hrs	95,0 %
LLMF after 6.000 hrs	94,0 %
LLMF after 8.000 hrs	93,0 %
LLMF after 12.000 hrs	91,5 %
LLMF after 16.000 hrs	90,0 %
LLMF after 20.000 hrs	89,0 %

Exclusion of liability

Changes to data are subject to prior notice. NBB Bohemia s.r.o. accepts no responsibility for damages caused by inaccurate interpretation of the content on this site.

Warning

If broken in a closed room, we recommend ventilation to reduce the mercury vapor concentration. Use protective equipment while working. Immediately remove the shards so that they do not get injured. After removing the shards, use the technical means for decontamination of mercury. For this purpose we supply decontamination kits, which you can order by phone or in our internet shop. The decontamination kit should not be missed especially in plants where there is a danger of breaking light sources containing mercury, such as stores, warehouses, but can also be used in households. In case of nausea, give first aid and call a physician.


Notice

Fluorescent tubes of all types require a corresponding type of ballast to operate. A suitable ballast type can be found in the detail of the item (additional products). The quality and type of the ballast greatly affect the life of the fluorescent lamp. NBB Bohemia is not responsible for shortening lamp life when the fluorescent lamp is connected to a ballast type that NBB Bohemia s.r.o. because in such a case we can not guarantee the suitability of using the ballast to the supplied fluorescent tube. When directly connected to the mains voltage without using the ballast, the fluorescent lamp will be destroyed. Fluorescent tubes are not suitable for connection to motion sensors or for connection to frequent switching devices. Frequent switching causes shortening of lamp life. Frequent switching is considered to switch the fluorescent lamp to an interval of less than 20 minutes.

Popis

Tri-band fluorescent tube T8 58W COLOURLUX plus warmwhite for general lighting.

Technical drawing

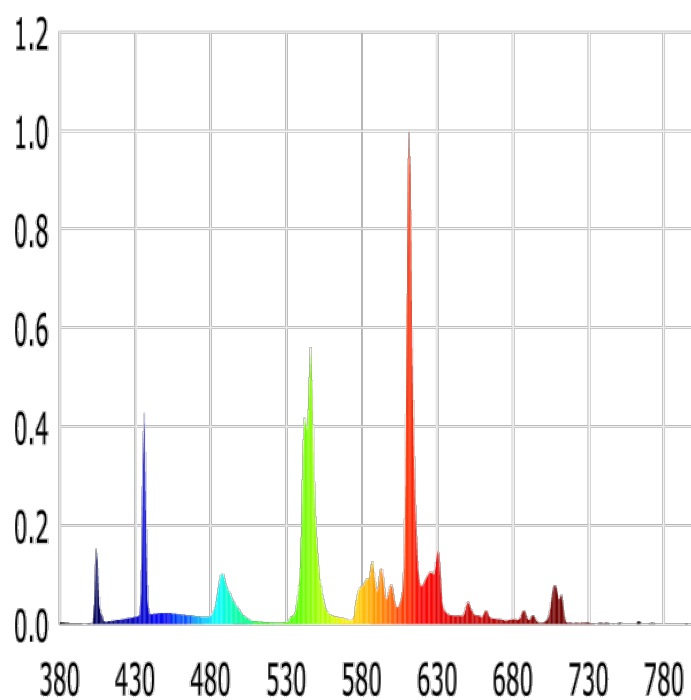

NBB Bohemia s.r.o., Sídliště 693, 407 22 Benešov nad Ploučnicí
<https://www.nbb.cz/en/> | hotmail@nbb.cz

Copyright CE 2024 NBB Bohemia s.r.o. Všechna práva vyhrazena.